

### 4.3.8 Data Copy


MSPG-7800S can be easily updated to Pattern & Timing, Scan, Function and Audio update just using the USB memory stick.




- ① Push the **K/B** key to activate edit list.



- ② Push the **DATA COPY** key to activate data copy window.

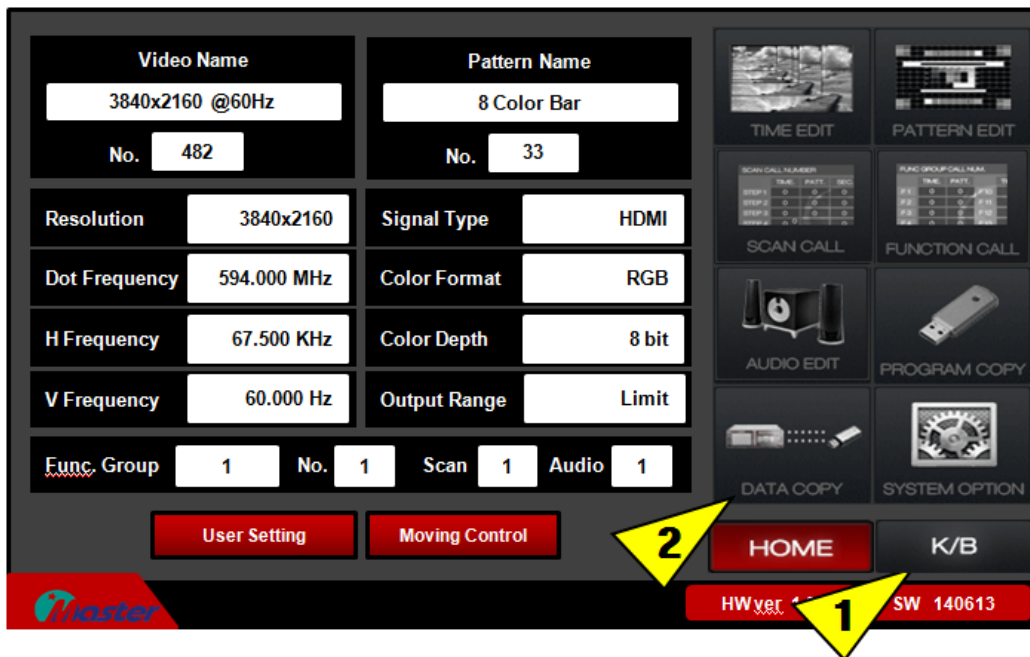

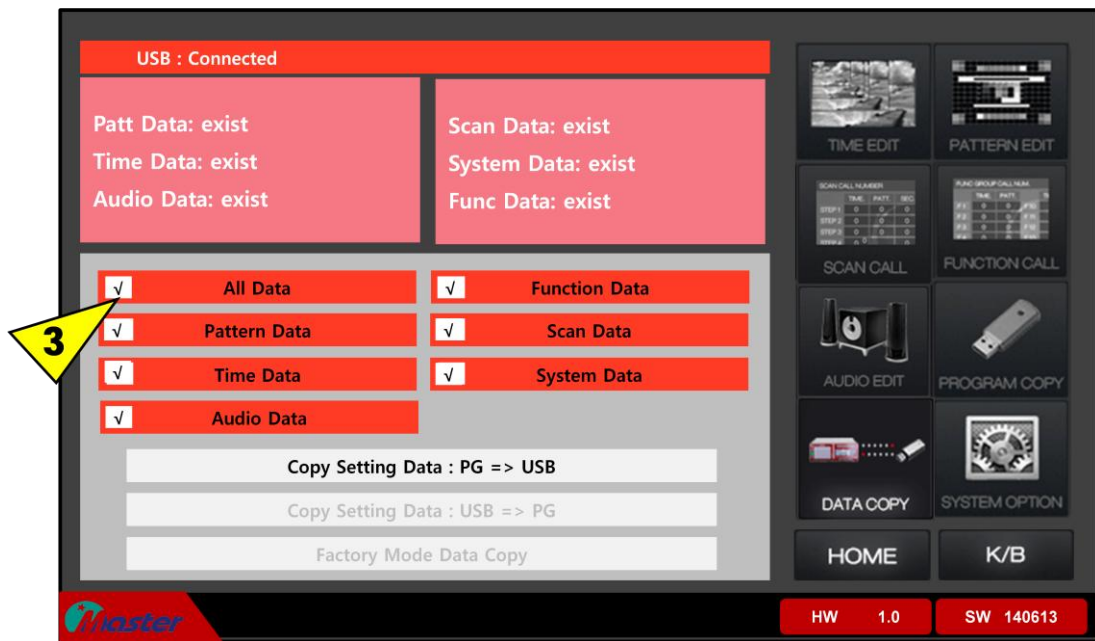

- ③ All Data: All of data include Function, Pattern, Scan, Time and Audio data. If you want to update for all of data, then please push the “All Data” for check.
- ④ Copy Setting Data: USB => PG: Selected DATA file will be update from USB Memory stick to MSPG-7800S. Password is set up to “8880”. Enter the password and it will be finish update within two second, with short “Bee” sound.
- (\*\*Before update, please make new folder name to “MSPG-7800S-DATA” in USB memory stick with each file data.” If there is no folder name to “MSPG-7800S-DATA”, then MSPG-7800S can’t find(recognize) data.)**
- Please prepare “MSPG-7800S-DATA.ZIP” file from Master Co., Ltd.
  - Please un-zip and saved to USB memory stick.
  - Connect USB memory stick to MSPG-7800S’s USB port. Push the K/B and push the Data Copy.
  - Check the All Data.
  - Push the “Copy Setting Data: USB => PG”.
  - Pass word set up to “8880” and push the OK.
  - Update will be finish within 1~2 seconds with “Bee” sound.(Existed 1~500Timing Data, 1~500Pattern Data, 1~99 Function Data, 1~99 Scan Data and 1~20 Audio data will be overwrite)